




- 多端口设计易于安装
- 可外接电磁阀，便于遥控操作启动迅速，自吸力
- 强
- Marny port,that design is easy to install.
- Easy to control in long distance.
able to connect with solenoid valve
- Quick to start.strong self-suction power

结构简单 坚固耐用
Simple Structure,
That Is Strong And Durable.

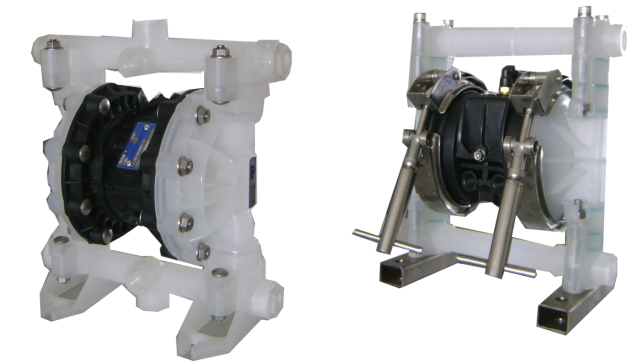

空气压力

耗气量

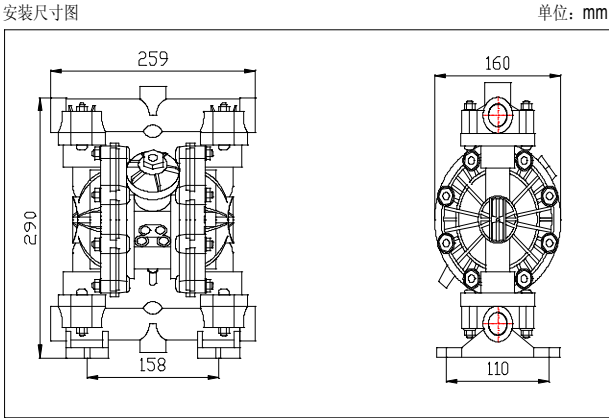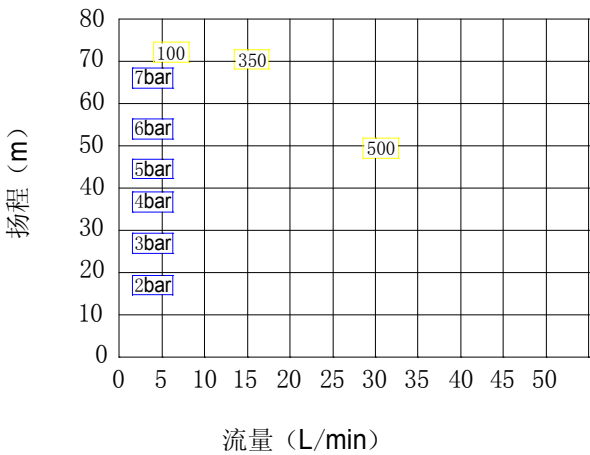

技术规格 Technical Specifications

最大工作压力 Max.working Pressu Re	100psi(0.7Mpa.7bar)
最大流量 Max.flow Rate	13.2gpm(50lpm)
最大往复速度 Max.reciprocating Speed	400cpm
最大虹吸高度 Max.suction Height	4m
最大输送固体颗粒 Max.permitted Grain	3/32in. (2.5mm)
最大空气消耗量 Max.ai R Consumption	28scfm0.672m ³ /min)
空气进口尺寸 Air Inlet Size	1/4 in.npt(f)
空气出口尺寸 Ait Outlet Size	3/8 in.npt(f)
流体进口尺寸 Fluid Inlet Size	1/2and3/4 in.npt(f)or bspt(f)
流体出口尺寸 Fiuid Outlet Size	1/2and3/4 in.npt(f)or bspt(f)
重量 Weight	PVDF pump 3.7kg 聚丙烯泵 PP pump 2.7kg