



- 流体压力可达 100psi
- 先导式的空气阀，可在线维修，并无需打开内腔
- 环氧涂层可抵御恶劣的工作环境
- Fluid pressure, up to 100psi
- Guided air valve can be repaired during work, no need to open the central body.
- The coat can protect from terrible working environment.

操作简单 维修方便
Easy To Operate And Repair

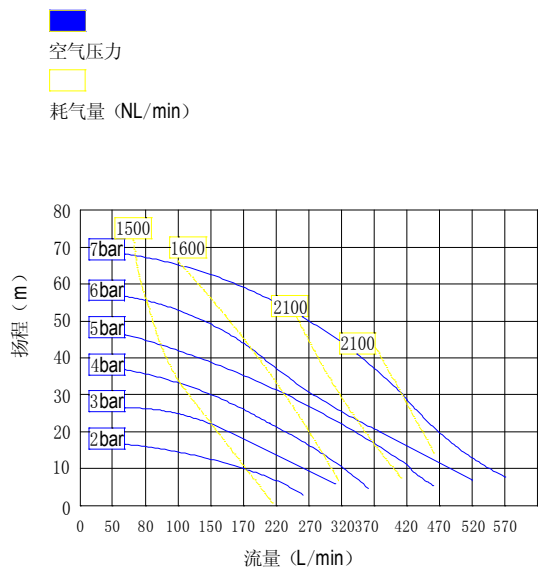

安装尺寸图

单位：mm

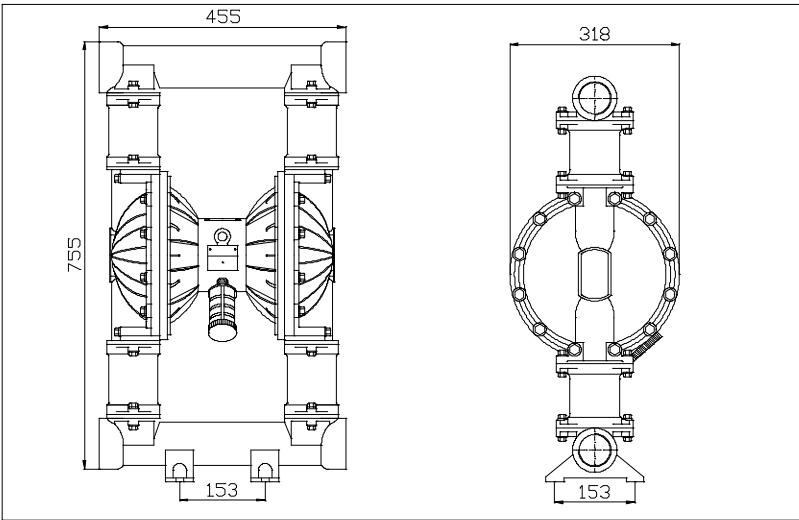

技术规格 Technical Specifications

最大工作压力 Max.working Pressu Re	100psi(0.7Mpa. 7bar)
最大流量 Max.flow Rate	150gpm(570lpm)
最大往复速度 Max.reciprocating Speed	145cpm
最大虹吸高度 Max.suction Height	5m
最大输送固体颗粒 Max.permitted Grain	6mm
最大空气消耗量 Max.ai R Consumption	175scfm(4.9m ³ /min)
空气进口尺寸 Air Inlet Size	1/2 in.npt(f)
空气出口尺寸 Ait Outlet Size	1/2 in.npt(f)
流体进口尺寸 Fluid Inlet Size	2 in.npt(f)
流体出口尺寸 Fiuid Outlet Size	2 in.npt(f)
重量 Weight	铝合金泵 Aluminum pump29.0kg 聚丙烯泵 PP Pump47.0kg